


Nets

TransSAFE[®]*net*

For almost all applications
Perfect match with our lashing straps

page 88-89

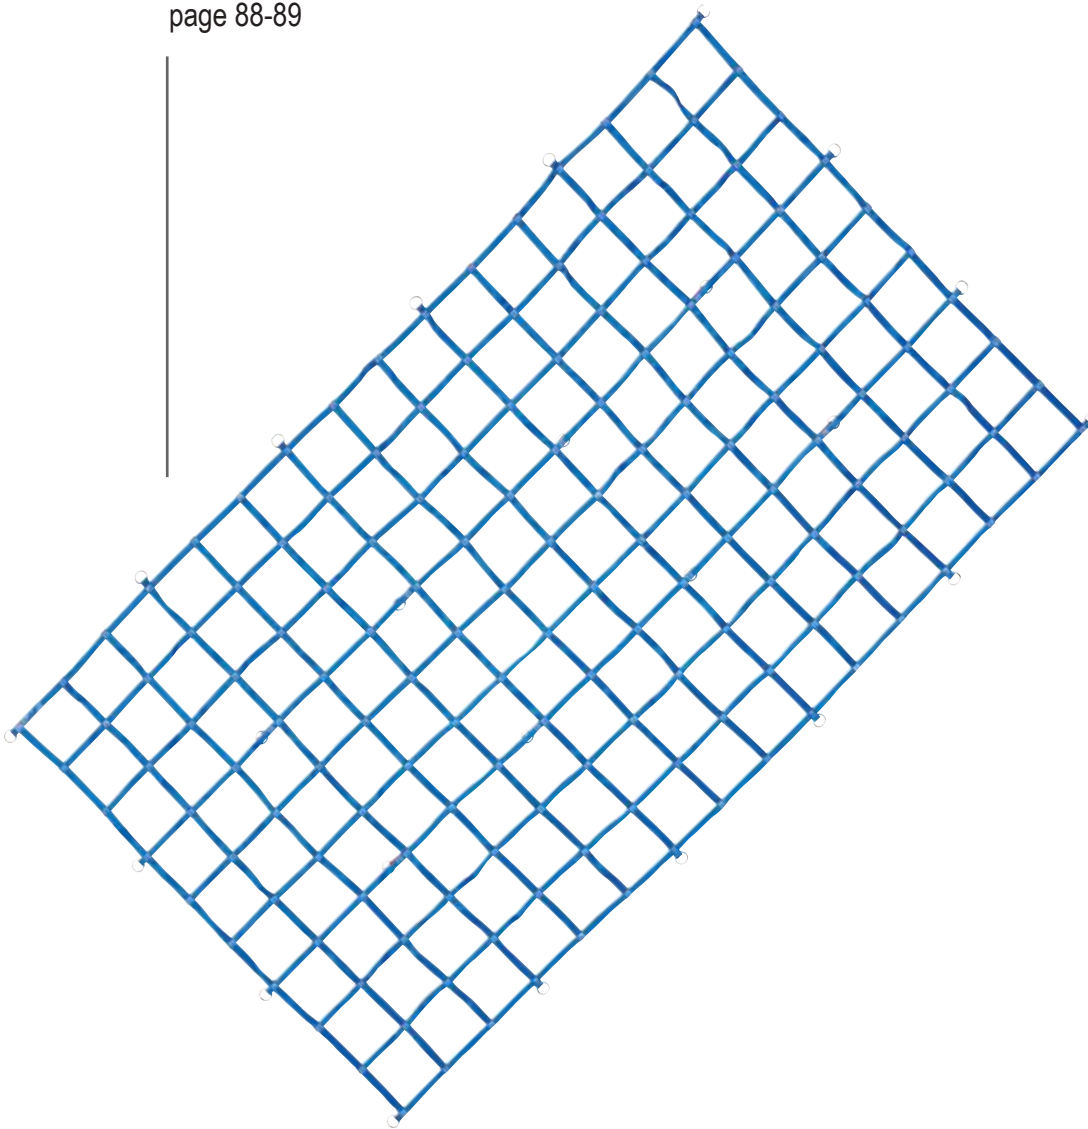


Nets custom-made



TransSAFE[®] *net*⁺


Creates load units
with integrated lashing strap

page 90-91

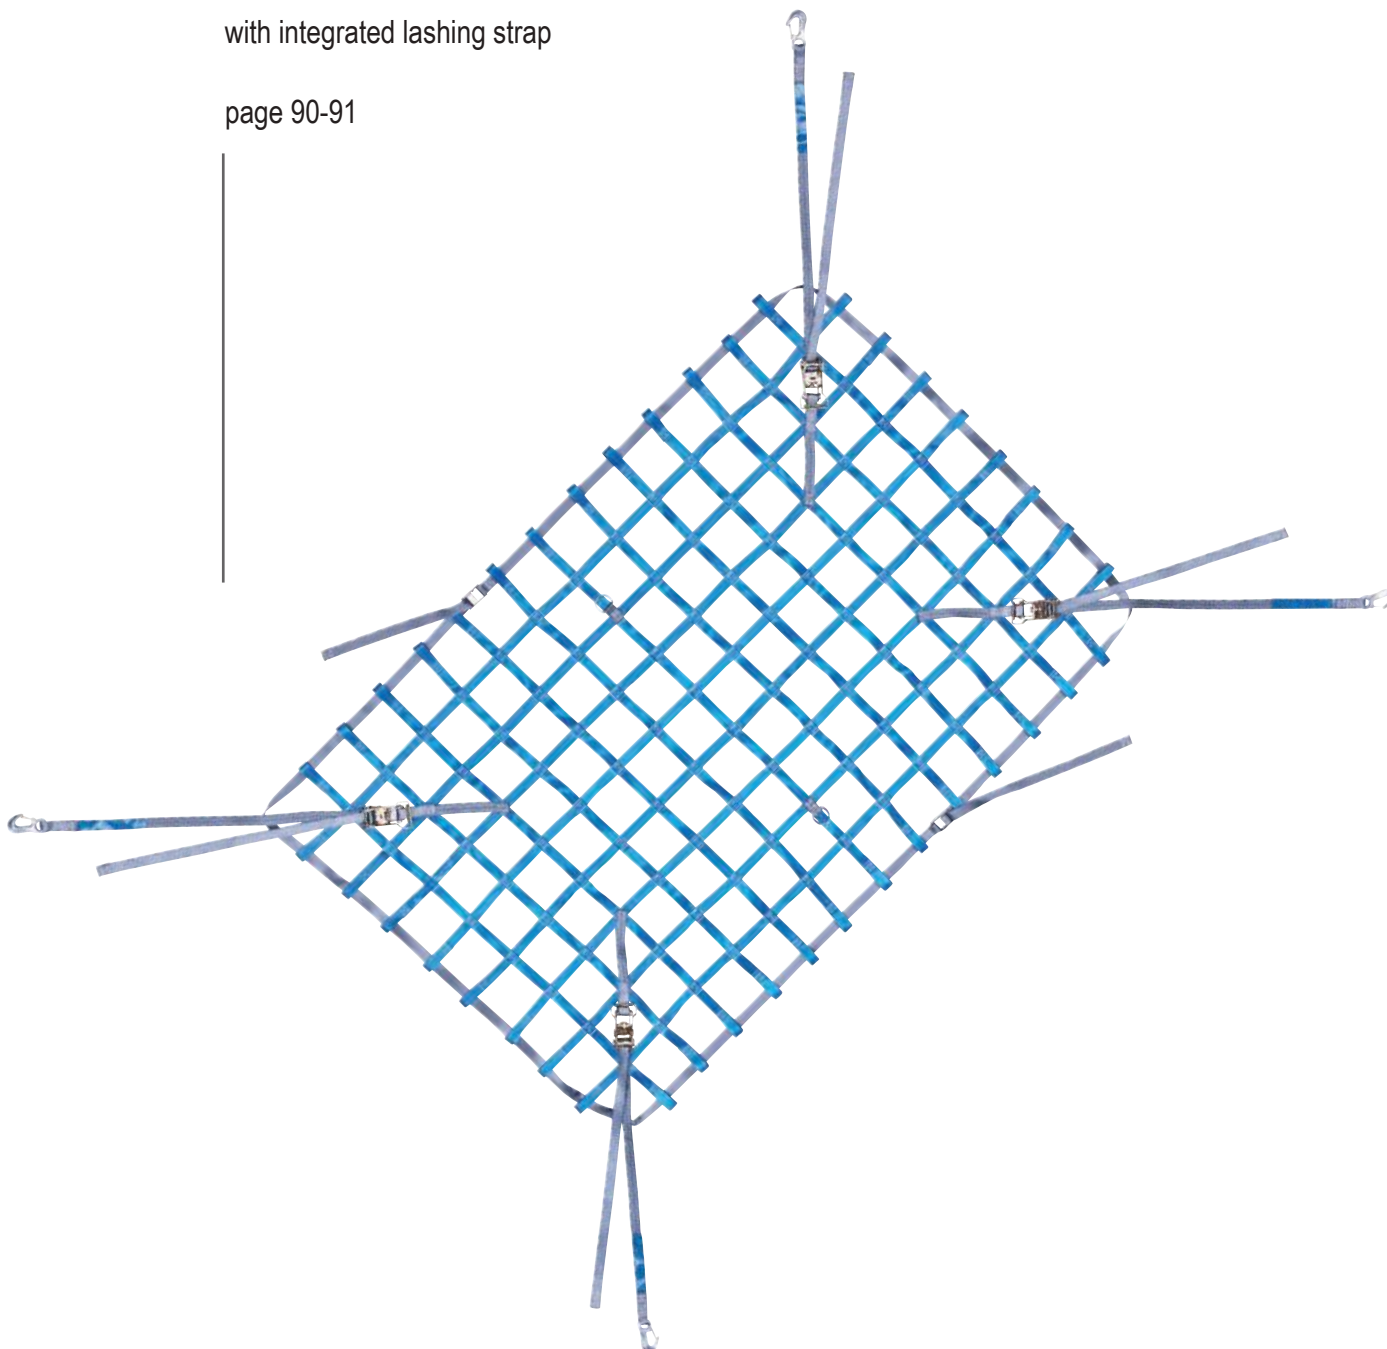

Nets


The right net for your application:

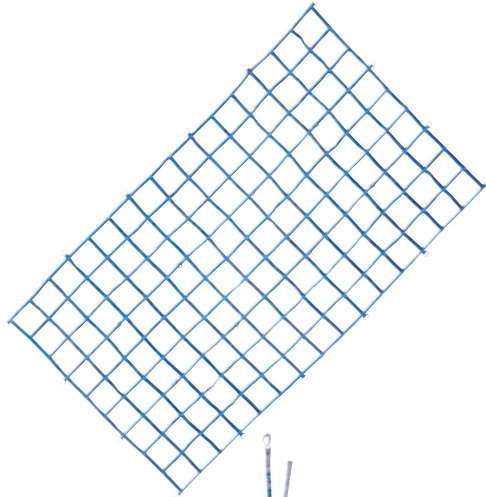

TransSAFE[®]net

The classic – universal and easy to handle


- wide selection of sizes and mesh dimensions ▶ ideal for every transportation task
- you determine net size and mesh width ▶ your made-to-order net even for an order of 1 unit
- compatible with our lashing straps ▶ configure your own system

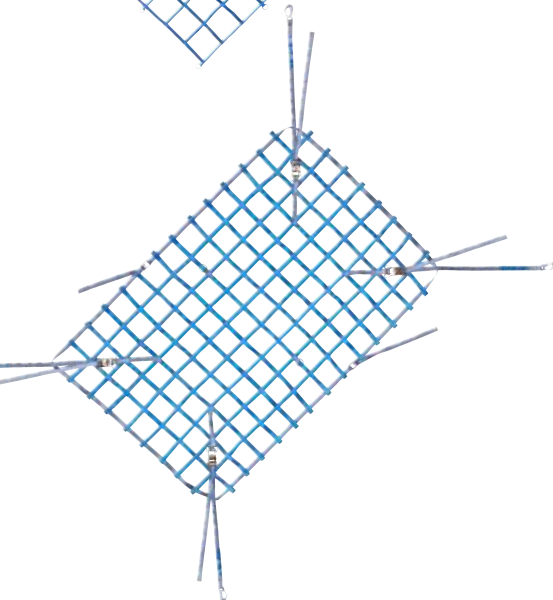

TransSAFE[®]net+

Our system net with even more features


- loop strap with lock ▶ create one load unit for maximum safety
- optional lashing elements in the net ▶ combine positive locking with friction
- use of our strap fittings ▶ no minimum order quantity required



Special Nets


Individual designs thanks to in-house development and production

- customized for special applications ▶ we develop nets according to your specifications
- use of tried and tested materials ▶ highest safety even with specialty products
- in-house development and manufacturing ▶ short delivery times even for specialty products




STRAPS & NETS

Your customized net. Compose yourself:

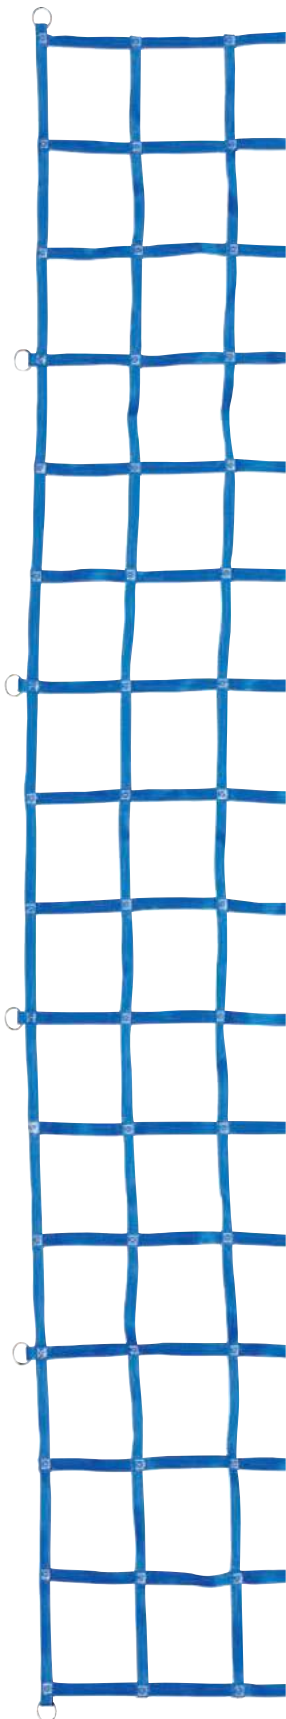

▶ Net size



Whether it's for a van, a long transporter or a semi-truck - only you know how big your net should be. Let us know, and we'll make it for you. To determine the optimal size, you need to know the size of your load space and the height of your load. A perfectly fitted net covers your load on the sides, front and back.

▶ Mesh width



Small boxes or large crates? Select your mesh width so that it is smaller than your smallest load to ensure that nothing will slip through. 150 to 200 mm in width and height are the most popular sizes.

▶ Webbing + Strap printing



Not just the technical aspects can be selected, but also the visual aspects. Select your favorite colour and we'll take care of the rest.

▶ End fitting





Select your end fittings to suit your needs. Whether you use Airline tracks or lashing points for all load capacities. Always with a corrosion-restraint.

▶ Lock



Select a lock to suit your load, lashing needs, the required pre-tensioning force and load capacity. With your TransSAFE®net+ you can even combine different locks in a single net. If it's not available, it doesn't exist yet.

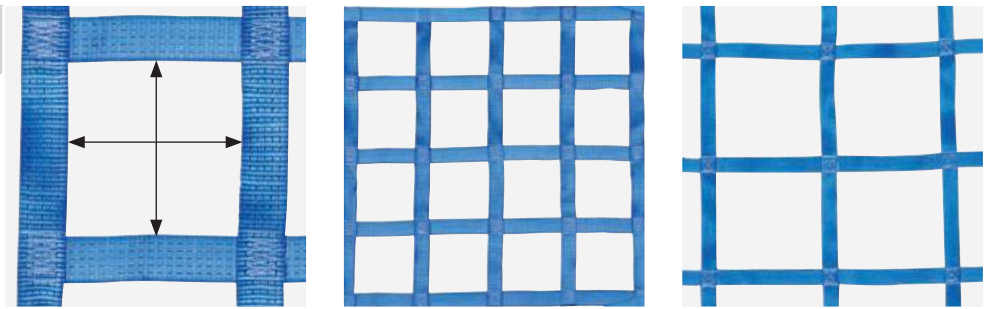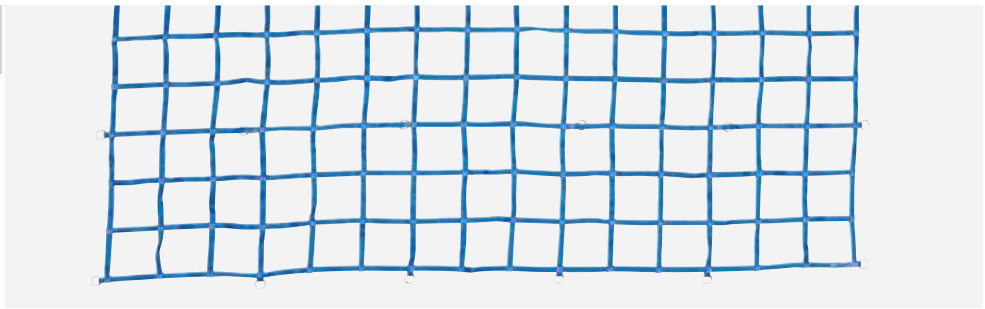



The classic. Flexible configuration, versatile and practical.










► Dimensions

1 - Dimensions	2 - Attachment	3 - Colour	Order code
	Long side in mm Please note: depending on the mesh size selected, it may not be possible to achieve exact drawing dimensions.		511260 + Long side dimensions xxxx
	Short side in mm Please note: depending on the mesh size selected, it may not be possible to achieve exact drawing dimensions.		Short side dimensions xxxx
	Mesh size on long side in mm A mesh size of 150-200 mm is most commonly, min. 100 mm is however possible.		Mesh size long side dimensions xxxx
	Mesh size on short side in mm A mesh size of 150-200 mm is most commonly, min. 100 mm is however possible.		Mesh size short side dimensions xxxx

► Attachment

✓	2 - Attachment	3 - Colour	Order code
	Steel rings in all four corners		Standard
	Additional steel rings on the sides In every 2nd, 3rd or 4th position. Counted from the outside, applies to long and short sides.		Steel ring every x. position
	Additional steel rings within the net The rings will be sewed to the net with the same pattern as the rings on the sides (see above).		Yes / no

► Colour

✓	✓	3 - Colour					Order code
							Colour
Blue	Red	Grey	Black	Olive	Orange	Green	

► Sample order code

511260	-	4600	-	2500	-	175	-	170	-	4	-	yes	-	Olive
TransSAFE® net		Long side		Short side		Mesh size long side		Mesh size short side		Steel ring every 4. position		Extra steel rings		Colour



The load capacity of the net is 500 daN with a flat load.

■ ■ ■ Accessories

																																
<p>Adapter strap with ratchet: 511263-1075 (order 4x)</p>	<p>Adapter strap with clamp lock: 511263-1078 (order 4x)</p>	<p>Sample order code</p> <table border="1"> <tr> <td>511263</td> <td>-</td> <td>71058</td> <td>-</td> <td>71234</td> <td>-</td> <td>Olive</td> <td>-</td> <td>3800</td> <td>-</td> <td>400</td> <td>-</td> <td>Cap/bumper</td> <td>-</td> <td>Label protector + Field-back</td> </tr> <tr> <td>25 mm lashing</td> <td></td> <td>End fitting</td> <td></td> <td>Lock</td> <td></td> <td>Colour</td> <td></td> <td>Strap length</td> <td></td> <td>Fixed end length</td> <td></td> <td>Strap printing</td> <td></td> <td>Extra</td> </tr> </table> <p>Your personal adapter strap, see page 62/63 (25 mm lashing straps)</p>	511263	-	71058	-	71234	-	Olive	-	3800	-	400	-	Cap/bumper	-	Label protector + Field-back	25 mm lashing		End fitting		Lock		Colour		Strap length		Fixed end length		Strap printing		Extra
511263	-	71058	-	71234	-	Olive	-	3800	-	400	-	Cap/bumper	-	Label protector + Field-back																		
25 mm lashing		End fitting		Lock		Colour		Strap length		Fixed end length		Strap printing		Extra																		



Do you know TransSAFE® go?
The intelligent net that pulls back automatically under the vehicle roof when not in use? Check www.allsafe-group.com/tsg



Compose a positive locking, load building unit with tie-down straps: The net that can do it all.



► Dimensions

1 - Dimensions	2 - Attachment	3 - Colour	4 - Extras	Order code
	Long side in mm Please note: depending on the mesh size selected, it may not be possible to achieve the exact length and width request.			511261 + Long side dimensions xxxx
	Short side in mm Please note: depending on the mesh size selected, it may not be possible to achieve the exact length and width request.			Short side dimensions xxxx
	Mesh size on long side in mm A mesh size of 150-200 mm is most common a min. of 100 mm is however possible.			Mesh size long side dimensions xxxx
	Mesh size on short side in mm A mesh size of 150-200 mm is most common a min. of 100 mm is however possible.			Mesh size short side dimensions xxxx

► Attachment

✓	2 - Attachment	3 - Colour	4 - Extras	Order code
	4 ratchet straps sewn on the corners For lashing down. You can choose from: Ratchet strap blue, with carabiner hook Ratchet strap grey, with carabiner hook Ratchet strap blue, with KERL 500 fitting for Airline tracks Ratchet strap grey, with KERL 500 fitting for Airline tracks			yes / no 511288-10 511288-20 511289-10 511289-20
	Type and number of locks Select the lock from the product range on the opposite page. For net sizes of 2500 x 1500 mm and above we recommend using a second lock as shown on the left.			Lock part no. xxx from page 93 Number of locks (1 or 2)
	Fitting for corners (Only possible in combinations where no sewn ratchet straps on the corners have been selected) Select the fittings from the product range on the opposite page.			Fitting part no. xxx from page 93
	Additional fittings on the sides (Only possible in combination with fittings on the corners) In every 2nd, 3rd or 4th position. Counted from the outside, applies to long and short sides.			End fitting product no. xxx from page 93 every x. position (select 0 if not required)

▶ Lock for the loop strap

✓	2 - Attachment	3 - Colour	4 - Extras	Order code
				Item no.
LC 400 daN*	LC 1000 daN*	LC 250 daN	LC 250 daN	
71 234	71 036	512132-10	512132-20	

▶ Fittings for corners and sides

✓	2 - Attachment	3 - Colour	4 - Extras	Order code
			Item no.	
LC 750 daN*	LC 300 daN*	LC 500 daN*		
71 026	511275	310 275		
LC 1100 daN*	LC 1250 daN*			
71 028	71 104			

* The information refers to the load capacity of the entire net with flat load. The minimum LC of lock and end fitting gives you the LC of the net.

▶ Colour

✓	✓	3 - Colour	4 - Extras	Order code
				Colour
Blue	Red	Grey	Black	
Olive	Orange	Green		

▶ Extras

✓	✓	✓	4 - Extras	Order code
	Strap and label printing	Customized strap print (allsafe print also available)	4 - Extras	Strap print
	- For the loop strap	No strap print		No print
		Individual print on the label		Label print

Note: around the net fastenings the wording is covered by the stitching. We recommend using short words.

▶ Sample order code

511261	-	1100	-	900	-	175	-	170	-	yes	-	2 x 71234	-	Olive/red	-	No print
TransSAFE®net+		Long side		Short side		Mesh size long side		Mesh size short side		4 ratchet straps sewn on the corners		Fitting		Colour		Without printing

